




6.11

# Proportional directional valves

## Type 4WREE

NG 6 and 10  
Up to 315 bar  
Up to 180 L/min



### Contents

|  |       |
|--|-------|
| Function and configuration                 | 02    |
| Symbols                                    | 03    |
| Ordering code                              | 03    |
| Technical data                             | 04    |
| Electrical connections, plug-in connectors | 05    |
| Integrated electronics                     | 06-07 |
| Characteristic curves                      | 07-10 |
| Unit dimensions                            | 11-14 |

### Features

- Direct operated proportional directional valve with electrical position feedback
- Closed loop control of the direction and size of a flow
- Operation is by proportional solenoids with a central thread and removable coil
- For subplate mounting: Porting pattern conforms to ISO 4401
- Spring centred control spool
- Integrated electronics (OBE) with voltage input or current input (A1 resp. F1)
- 4WRE separate order: analogue module amplifier

## Function and configurations


4WREE are operated by proportional solenoids with central thread and removal coil. The solenoids are optionally controlled by either external electronics type 4WREE.

The valve basically consists of: Housing (1), Compression springs (2), Control spool (3), and Solenoid (4 and 5) with central thread, Solenoid (5) with position transducer and optional integrated control electronics (6).


In the de-energised condition the spool (3) is held in a mechanical centre position by the solenoid return springs (2).

– With the solenoids (4), de-energised, the control spool (3) is held in the central position by the compression springs (2).

– Direct operation of the control spool (3) by energising one of the proportional solenoids (4 and 5) e.g. control of solenoid right, then movement of the control spool (3) to the left in proportion to the electrical input signal, and connection from P to A and B to T via orifice-like crosssections with progressive flow characteristics.



Type 4WREE 6...-L2X/...

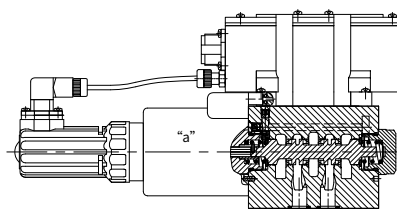


Type 4WREE 10...A-L2X/...

4WREE...A-L2X the 2 switched position valves are however only fitted with solenoid "a". A plug (7) is fitted in place on the "b" proportional solenoid.


## Symbols

### With integrated electronics


Type 4WREE...-L2X/...



Type 4WREE...A-L2X/...



### Ordering code

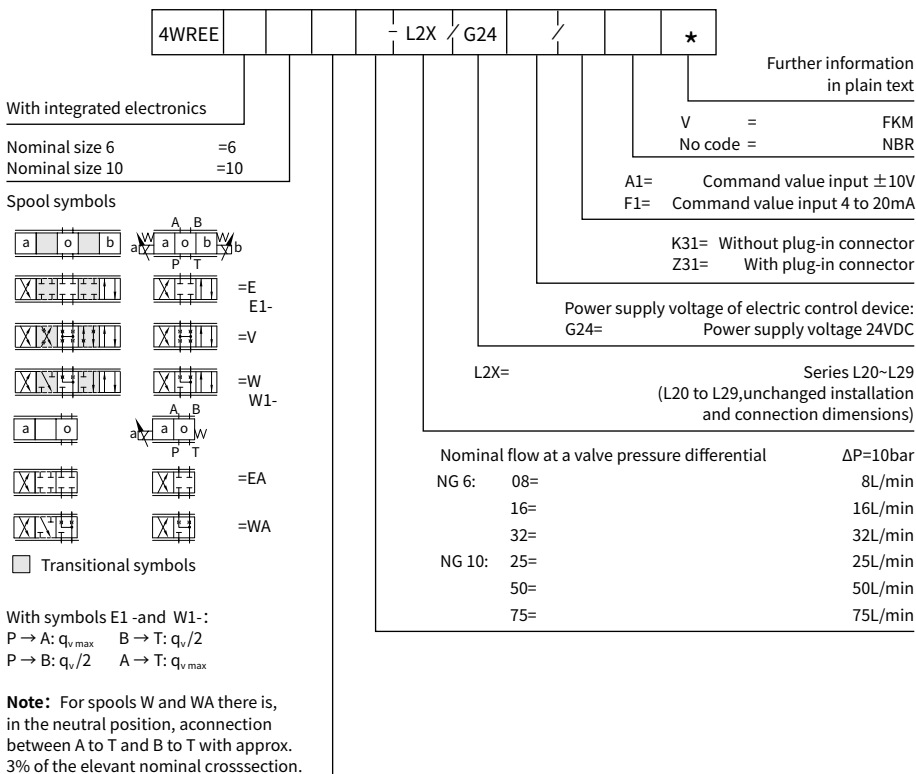

# Technical data

|   |               |                    |   |            |
|---|---------------|--------------------|---|------------|
| <b>1. Hydraulic</b>                           |               |                    |   |            |
| Installation                                  |               |                    | Optional, preferably horizontal           |            |
| Nominal size                                  |               |                    | 6   | 10         |
| Weight  | 4WREE...L2X   | kg                 | 2.4                                       | 6.5        |
| Nominal flow $q_{nom}$ at $\Delta p = 10$ bar |               | L/min              | 8, 16, 32                                 | 25, 50, 75 |
| Hysteresis                                    |               | %                  | $\leq 0.1$                                |            |
| Reversal span                                 |               | %                  | $\leq 0.05$                               |            |
| Response sensitivity                          |               | %                  | $\leq 0.05$                               |            |
| Max.operating pressure                        | Ports A, B, P | bar                | 315                                       |            |
|   | Port T        | bar                | 210                                       |            |
| Pressure fluid                                |               |                    | Mineral oil (HL, HLP) to DIN 51524        |            |
|   |               |                    | Other pressure fluids on request!         |            |
| Ambient air temperature range                 | 4WREE...L2X   | °C                 | -20°C to 50°C (-4° F to 122° F)           |            |
| Viscosity range                               |               | mm <sup>2</sup> /s | 20 to 380 (preferably 30 to 46)           |            |
| Fluid Cleanliness Class                       |               |                    | NAS1638 class9 or ISO 4406 class 20/18/15 |            |

| 2. Electrical                  |                      |     |                              |      |
|--------------------------------|----------------------|-----|------------------------------|------|
| 1) Solenoid data               |                      |     |                              |      |
| Nominal size                   |                      |     | 6                            | 10   |
| Voltage type                   |                      |     | DC                           |      |
| Command value signal for 4WREE |                      |     | ± 10V or 4~20mA              |      |
| Max.current per solenoid       |                      | A   | 2.5                          |      |
| Solenoid coil resistance       | Cold value           | Ω   | 2.7                          | 3.7  |
|                                | Max.warm value       |     | 4.05                         | 5.55 |
| Duty                           |                      | %   | ED100%                       |      |
| Max.coil temperature           |                      | °C  | 150                          |      |
| Valve protection to EN 60529   |                      |     | IP 65                        |      |
| 2) Control electronics         |                      |     |                              |      |
| Amplifier                      | 4WREE...L2X          |     | integrated in the valve(OBE) |      |
| Supply voltage                 | Nominal voltage      | VDC | 24                           |      |
|                                | Lower limiting value | V   | 19.4                         |      |
|                                | Upper limiting value | V   | 35                           |      |
| Amplifier power consumption    | I <sub>max</sub>     | A   | < 2                          |      |
|                                | Impulse current      | A   | 3                            |      |


## Electrical connections, plug-in connectors

nominal dimensions in mm

• For type 4WREE...L2X (with integrated electronics (OBE))


For pin allocation also see block circuit diagram.

Plug-in connector to DIN EN 175201-804

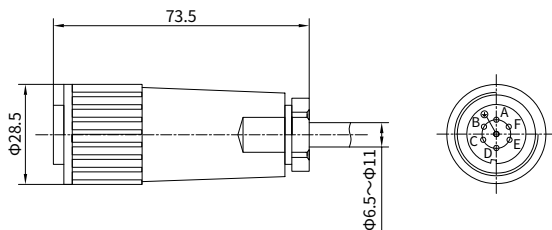


• Inductive position sensor

Coil wiring

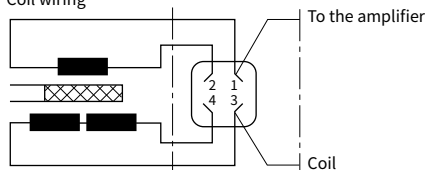

connect to the plug

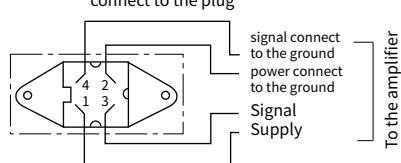


Plug connector 4 pin Pg7-G4W1F

**Connecting cables:**

**Recommend:** For cables up to 50 m in length,  
Please use a cable of type LiYCY 4 × 0.25 mm<sup>2</sup>

Connect the shield to the PE only on the supply side.

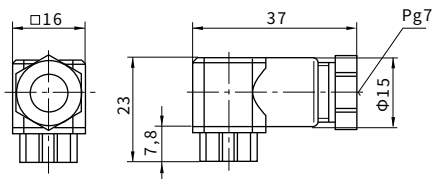

Integrated control electronics for type 4WREE

Component plug allocation


|                                    | Contact | Interface A1 signal                             | Interface F1 signal                               |
|------------------------------------|---------|---|---|
| Supply voltage                     | A       | 24 VDC(U(t)=19.4V to 35V), I <sub>max</sub> =2A |   |
|                                    | B       | 0V  |   |
| Reference potential (actual value) | C       | ref.contact F, Re>50KΩ                          | ref.contact F, Re<10Ω                             |
| Differential amplifier input       | D       | ± 10V, Re>50KΩ                                  | 4 to 20mA, Re>100Ω                                |
|                                    | E       | Reference potential command value               |   |
| Measurement output (actual value)  | F       | ± 10 V actual value (limiting load 5mA)         | 4 to 20 mA actual value, load resistance max.300Ω |
|                                    | PE      | Connected with cooling body and valve housing   |   |

**Command value:** A positive command value 0 to +10V (or 12 to 20mA) at D and the reference potential at E results in a flow from P to A and B to T.  
A negative command value 0 to -10V (or 12 to 4mA) at D and the reference potential at E results in a flow from P to B and A to T.  
For a valve with 1 solenoid on side a (e.g. spool variants EA and WA) a positive command value at D and the referencepotential at E results in a flow from P to B and A to T.

**Actual value:** A positive actual value 0 to +10V (or 12 to 20mA) at F and the reference potential at C results in flow from P to A and B to T,  
A negative actual value 0 to -10V (or 4 to 12mA) at F and the reference potential at C results in flow from P to B and A to T.  
With valves with 1 solenoid, a positive actual valueat F and referencepotential at C results in flow from P to B and A to T.

**Connection cable:** Recommended: - up to 25 m cable length type LiYCY 7×0.75 mm<sup>2</sup>  
- up to 50 m cable length type LiYCY 7×1.0 mm<sup>2</sup>  
For outside diameter see plug-in connector sketch  
Only connect screen to PE on the supply line.


Integrated electronics (OBE) for type 4WREE...L2X

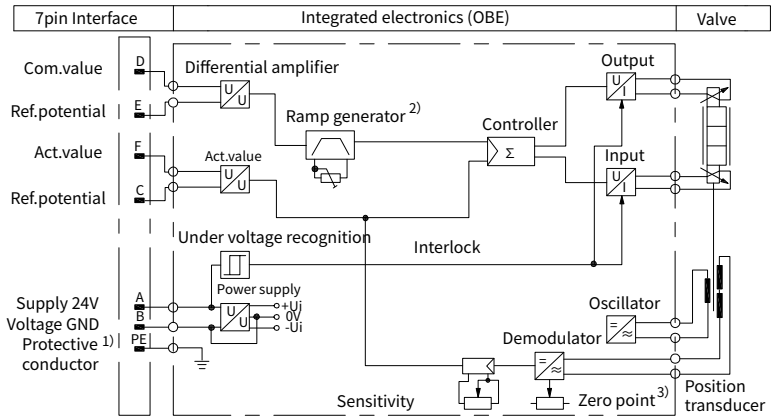

## Integrated control electronics for type 4WREE

**Note:** Electrical signals processed by control electronics (e.g. actual value) must not be used for switching off safety relevant machine functions!

- 1) The protective conductor (PE) is connected to the cooling body and the valve housing!
- 2) The ramp is externally adjustable from 0 to 2.5s, the same applies for  $T_{up}$  and  $T_{down}$ .
- 3) Zero point is externally adjustable.


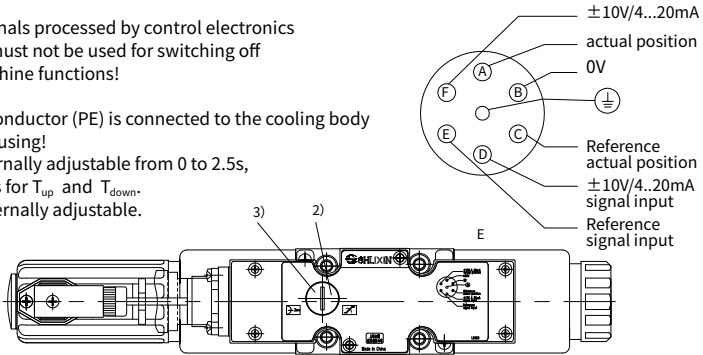


## Characteristic curves



(measured with HLP46,  $\vartheta_{oil} = 40^\circ\text{C} \pm 5^\circ\text{C}$ )

### • Type 4WREE (NG 6 and 10)

Pressure-signal-characteristic curves (V spool,  $P_s = 100\text{ bar}$ )

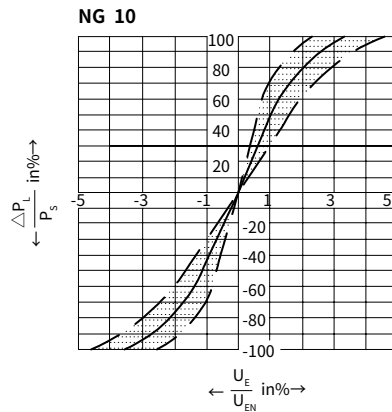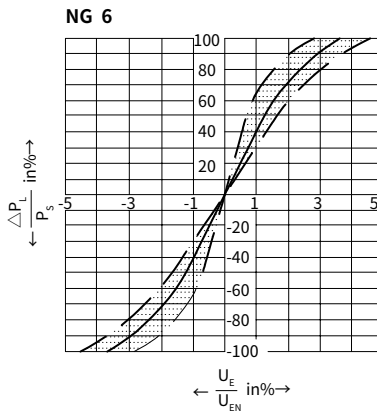

### Leakage flow with the spool in the central position

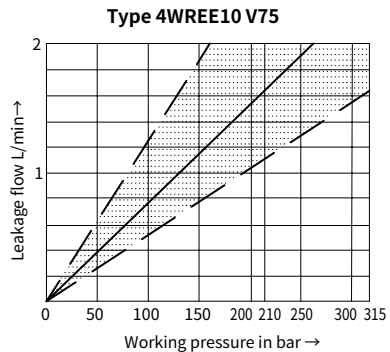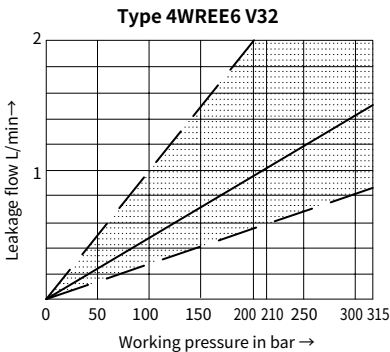


Characteristic curves (measured with HLP46,  $\vartheta_{oil}=40^{\circ}\text{C} \pm 5^{\circ}\text{C}$ ,  $P=100\text{bar}$ )


• Type 4WREE (NG 6 and 10)

NG 6


8L/min nominal flow at a 10 bar valve pressure differential

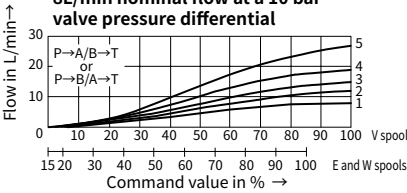

32L/min nominal flow at a 10 bar valve pressure differential

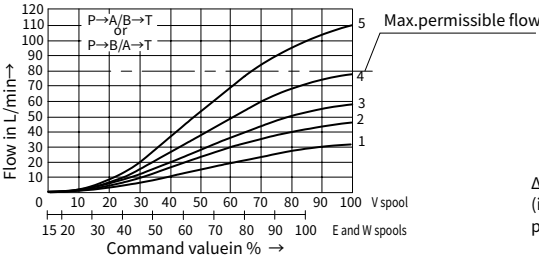

16L/min nominal flow at a 10 bar valve pressure differential

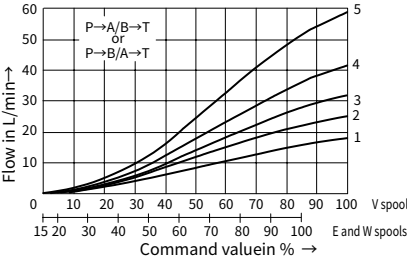


- 1  $\Delta p=10\text{bar}$  constant
- 2  $\Delta p=20\text{bar}$  constant
- 3  $\Delta p=30\text{bar}$  constant
- 4  $\Delta p=50\text{bar}$  constant
- 5  $\Delta p=100\text{bar}$  constant


$\Delta p$ =Valve pressure differential  
(inlet pressure  $p_p$  minus load pressure  $p_L$  minus return pressure  $p_r$ )

NG 10


25L/min nominal flow at a 10 bar valve pressure differential

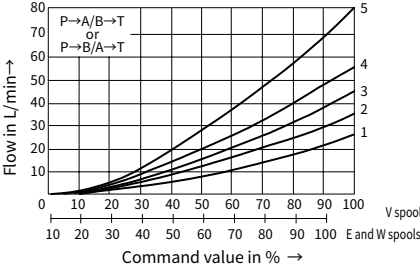

50L/min nominal flow at a 10 bar valve pressure differential

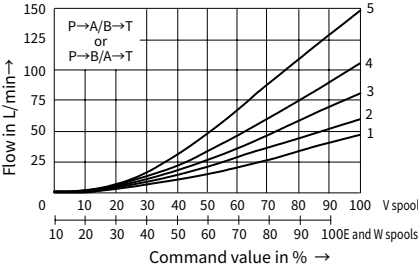

75L/min nominal flow at a 10 bar valve pressure differential

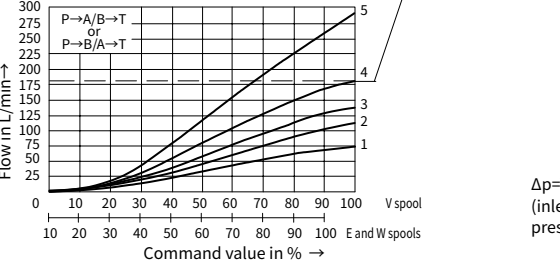


$\Delta p$ =Valve pressure differential  
(inlet pressure  $p_p$  minus load pressure  $p_L$  minus return pressure  $p_r$ )




## Characteristic curves (measured with HLP46, $\vartheta_{oil}=40^{\circ}\text{C} \pm 5^{\circ}\text{C}$ , $P=100\text{bar}$ )

### • Type 4WREE (NG 6)

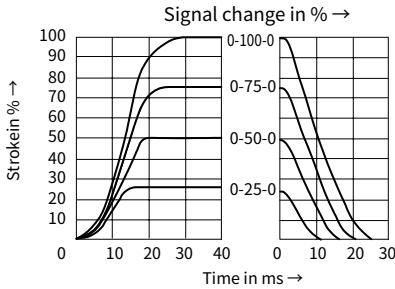

**Transient function with a stepped form of electrical input signal**

4/3 valve version,  
Spool symbol "E"

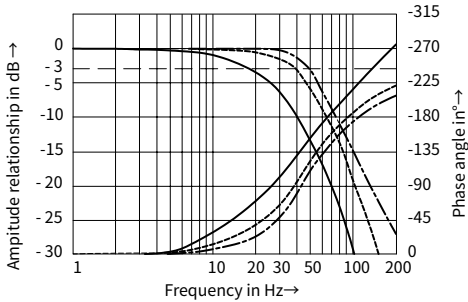


**Frequency response characteristic curves**

4/3 valve version,  
Spool symbol "V"

— Signal  $\pm 10\%$   
 ..... Signal  $\pm 25\%$   
 — Signal  $\pm 100\%$

### Flow-pressure differential curve


Load function with maximum valve opening.  
Nominal flows 8, 16 and 32 L/min.  
Spool symbol "V"

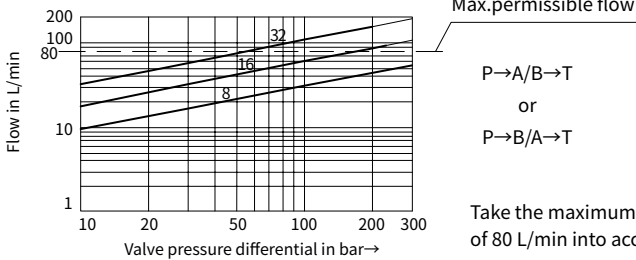


Take the maximum permissible flow  
of 80 L/min into account!

Characteristic curves (measured with HLP46,  $\vartheta_{oil}=40^{\circ}\text{C} \pm 5^{\circ}\text{C}$ ,  $P=100\text{bar}$ )

• Type 4WREE (NG 10)

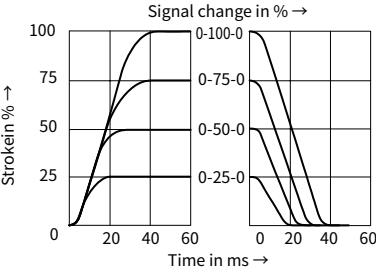

**Transient function with a stepped form of electrical input signal**  
4/3 valve version,  
Spool symbol "E"

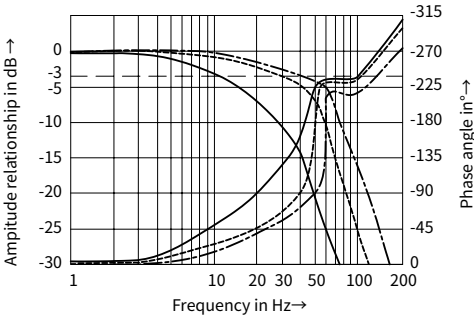


**Frequency response characteristic curves**  
4/3 valve version,  
Spool symbol "V"

— Signal  $\pm 10\%$   
..... Signal  $\pm 25\%$   
—— Signal  $\pm 100\%$

**Flow-pressure differential curve**

Load function with maximum valve opening.  
Nominal flows 25, 50 and 75 L/min.  
Spool symbol "V"

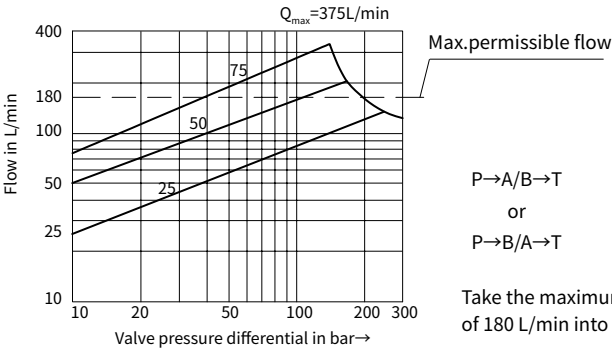


P→A/B→T  
or  
P→B/A→T

Take the maximum permissible flow  
of 180 L/min into account!

## Unit dimensions

(nominal dimensions in mm)

### Type 4WREE6...L2X

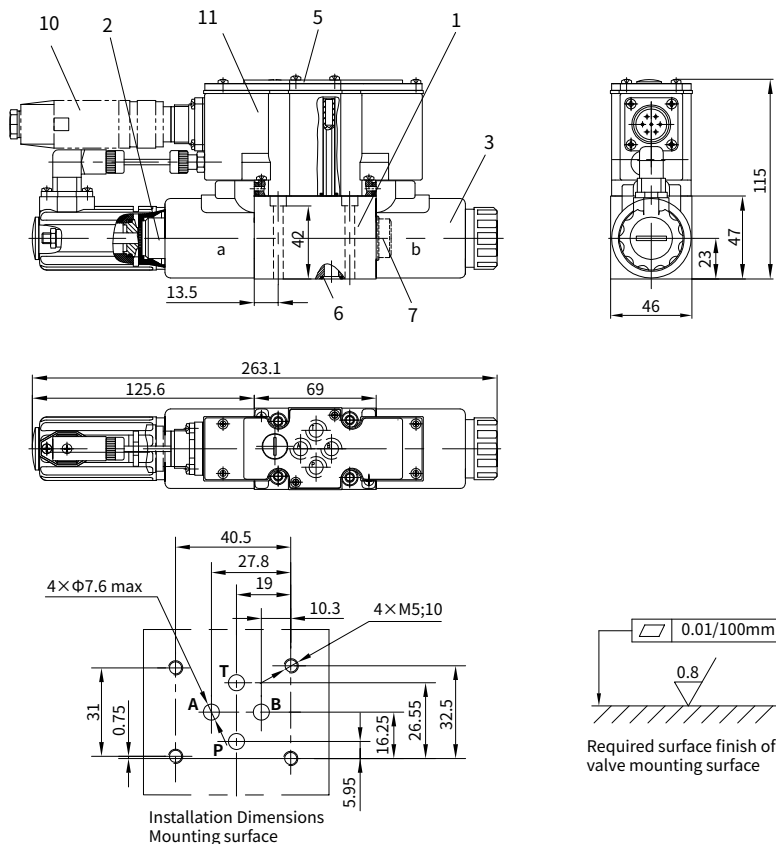

- 1 Valve housing
- 2 Proportional solenoid "a" with inductive position transducer
- 3 Proportional solenoid "b"
- 5 Name plate
- 6 Identical seal rings for ports A, B, P and T (R-ring  $9.81 \times 1.5 \times 1.78$  or O-ring  $9.25 \times 1.78$ )
- 7 Plug for valves with one solenoid (2 switching positions, versions EA or WA)
- 10 Plug-in connector
- 11 Integrated electronics (OBE)

#### Valve mounting screws


The following valve fixing screws are recommended:

- 4 S.H.C.S.ISO 4762 - M5×50-10.9
- 4 GB / T 70.1 - M5×50 - 10.9
- Tightening torque  $M_A = 8.9 \text{ Nm} \pm 10\%$

## Unit dimensions

(nominal dimensions in mm)

### Type 4WREE10...L2X

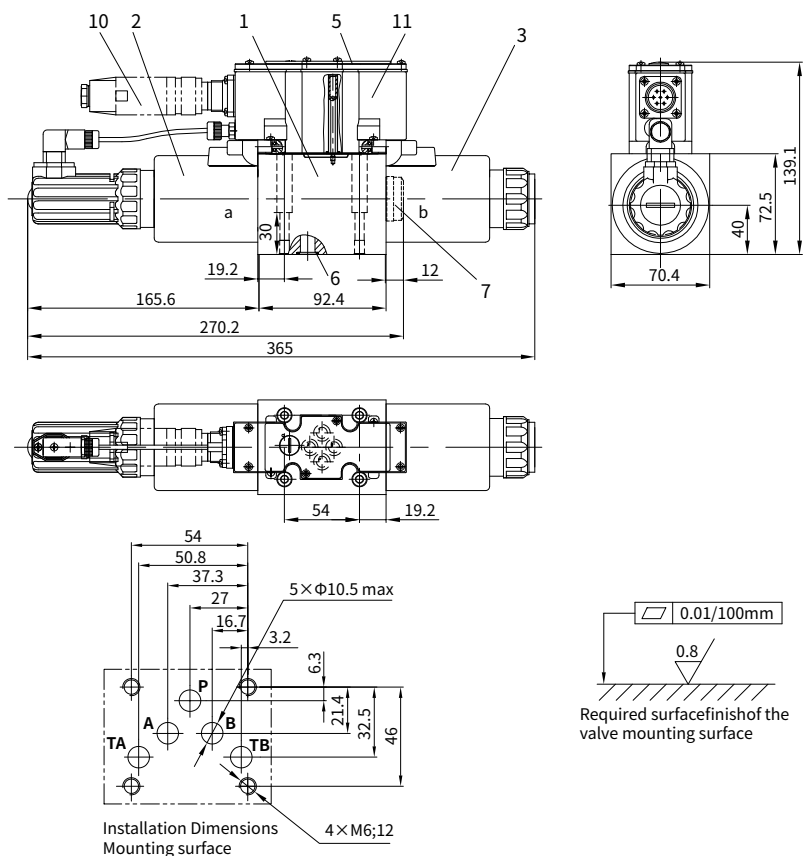

- 1 Valve housing
- 2 Proportional solenoid "a" with inductive position transducer
- 3 Proportional solenoid "b"
- 4 Name plate
- 5 Identical seal rings for ports A, B, P and T (R-ring  $13 \times 1.6 \times 2$  or O-ring  $12 \times 2$ )
- 6 Plug for valves with one solenoid (2 switching positions, versions EA or WA)
- 7 Plug-in connector
- 8 Integrated electronics (OBE)

#### Valve mounting screws

The following valve fixing screws are recommended:

- 4 S.H.C.S. ISO 4762-M6 × 40-10.9
- 4 GB/T 70.1-M6 × 40-10.9
- Tightening torque  $M_A = 15.5 \text{ Nm} \pm 10\%$