



2.18

Explosion-proof electro-hydraulic directional valve

Type GWEH10, 16, 25../6B2

Sizes 10 ~ 25
Up to 350 bar
Up to 1100L/min



Contents

Function and configuration	02-06
Ordering code	07-08
Symbols	09-11
Technical data	12-15
Characteristic curves	16-17
Performance limit	18-19
Pilot-operated solenoid valve	20
Unit dimensions	21-23

Features

- Valves used to control the start, stop and direction of a fluid flow
- Electro-hydraulic operation (WEH)
- 4/2- or 4/3-way version
- Porting pattern to DIN 24 340 form A, ISO 4401 and CETOP-RP 121 H
- Pressure-tight chamber needs not to be opened for a coil change

Function and configuration

The GWEH../6B2..type explosion-proof electro-hydraulic directional valve is a directional valve taking the electro-hydraulic solenoid valve as the pilot control; it applies the plate-type connection, and the connection dimension is in accordance with the DIN 2430 and ISO 4401 standards. There are many different performances and additional devices for choice.

Valves of type GWEH../6B2.. are directional spool valves with electrohydraulic operation, using the directional explosion-resistant valve as pilot control. They control the start, stop and direction of a fluid flow.

The directional valves basically consist of the main explosion-resistant valve with housing (1), main control spool (2), one or two return springs, and the pilot explosion-resistant valve (4) with one or two solenoids.

The main control spool (2) is held in the neutral or in the initial position either by the springs or by means of pressure. Pilot explosion-resistant valve has wet DC or AC solenoids (5), optional. The main control spool is shifted by pilot explosion-resistant valve (4).


There are four patterns on supply and drain of control oil, see the function diagram.

Following are descriptions of various types of valves:

1. Main valves are spring centered-type 3-position four-way directional valves

The main control spool (2) is held in the neutral position by two return springs (3), and the two spring chambers (6) are connected to the tank via the pilot explosion-resistant valve (4). The pilot oil is supplied via the pilot line (7). When the pilot explosion-resistant valve (4) switches direction (one solenoid of the pilot explosion-resistant valve energizes), the pilot fluid acts on the one end of the main spool (2) and pushes it (2) to move and the required port is connected, thus the flow direction of the fluid is changed.

When the solenoid is de-energized, the pilot spool returns to its initial position (exception: impulse valve). The spring chambers (6) are connected to tank by pilot explosion-resistant valve (4). Under the force of spring, the spool returns to its neutral position. The oil in the spring chamber (6) flows to return line from external port Y or internal line T via the pilot valve (4).

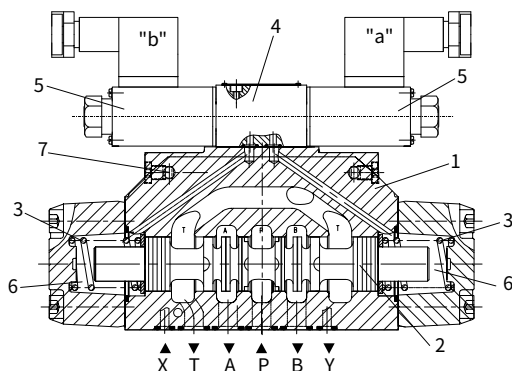

Structural drawing of GWEH..25/6B2..type spring aligned explosive-proof electro-hydraulic directional valve

- 1- Main valve body
- 2- Main valve spool
- 3- Reset spring
- 4- Pilot Explosion protection solenoid valve
- 5- Explosion protection solenoid
- 6- Spring chamber
- 7- Control oil passage

Function and configuration

2-position four-way directional valves

(this kind of valve has four different structures and Types)

1. Type G4WEH.../6B2...

This kind of pilot valve and main valve have a reset spring each, resetting by spring force.

2. Type G4WEH...H.../6B2...

This kind of valve has a reset spring, making pilot valve spool stay in initial position. Main valve spools change directions under effect of pressure oil.

3. Type G4WEH...H.../O6B2...

This kind of valve has two solenoids. There are no reset springs in pilot valves and main valves, thus using solenoids and pressure oil to make pilot valves and main valve spools change directions. Therefore, at least one solenoid shall be under working state.


4. Type G4WEH...H.../OF6B2...

This kind of valve has two solenoids and locators which makes pilot valve spools stay in working position (impulse valves). Main valve spools have no locating devices, moving downward to corresponding working positions under effect of pressure oil.

Structure 2, 3 and 4 preceding are hydraulic reset. Main valve spools can stay in the working position only under the effect of pressure oil.

Throttle insert

The use of a throttle insert is required if the pilot oil supply in the P channel of the pilot valve is to be limited. This throttle is inserted in the P channel of the pilot valve.



Structure chart of plug-in dampers

Function and configuration

Pilot oil supply:


1. Type GWEH10.../6B2..

(1) Conversion between internal supply and external supply:

P hole on the top of main valve bodies with M6 bolt(2) is external supply and with M6 bolt (2)dismantled is internal supply.

(2) Conversion between internal drain and external drain:

Dismounting plug screws and installing M6 bolt(2) is external drain; Dismounting M6 bolt(2) is internal drain.

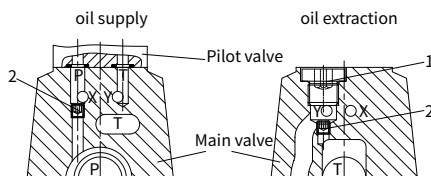

Structure chart of GWEH10.../6B2... model supply and discharge


2. Type GWEH16.../6B2..

(1) Conversion between internal supply and external supply:

Dismounting plug screw(10) form P hole on the undersurface of main valves and installing M6 bolt(9) is internal supply. Dismounting M6 plug bolt(9) id internal supply.

(2) Conversion between internal drain and external drain:

10 Pilot valveDismounting plug screw(10) form T hole on the top of main valves and installing M6 plug bolt(9) is internal drain. Dismounting M6 bolt(9) is external drain.

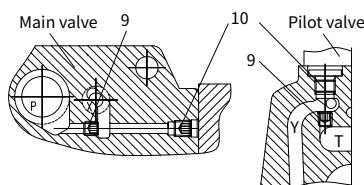

Structure chart of GWEH16.../6B2... model supply and discharge


3. Type GWEH25.../6B2..

(1) Conversion between internal supply and external supply:

P hole on the top of main valve bodies with M6 bolt(6) is external supply and with M6 bolt (6)dismantled is internal supply.

(2) Conversion between internal drain and external drain:

Dismounting plug bolt(6) form T hole on the top of main vlaves. Dismounting M6 bolt(6) is external drain.



Structure chart of GWEH25.../6B2...model supply and discharge


Function and configuration

Switching time adjustment:

In order to influence the switching time of the main valve a double throttle check valve has to be fitted between pilot valves and main valves to control oil supply from pilot valves into main valve spools, thus adjusting the switching time of main valves.

Regulating bolt rotation clockwise, the time for switching of main valves is long, otherwise the time is short.

The throttle check valve has two kinds: meter-in throttling and meter-out throttling. If there is a need of changing meter-in throttling into meter-out throttling, just install the valve after rotating 180° around the longitudinal axis again and then install pilot valves.

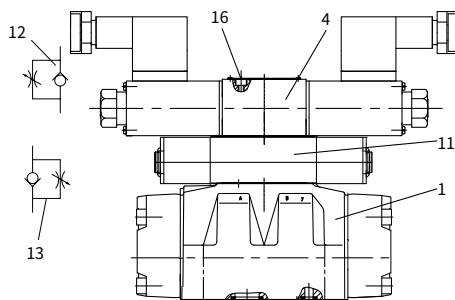

- 1- Main valve
- 4- Pilot valve
- 11- Switching time regulator(Z2FS6)
- 12- Meter-out throttling
- 13- Meter-in throttling
- 16- Set screw M5×L GB/T70.1-10.9 grade, the length of L is determined by height stacked, tightening torque 8.9 Nm.

Figure of GWEH.../6B2...S or S2 type commutating time regulator for valve installation


Pressure reducing valves:

The pressure reducing valve (8) must be used if the pilot pressure is higher than 250 bar. Pressure reducing ratio of constant-ratio pressure reducing valves(D1)1:0.66.

Pressure reducing pressure of constant-ratio pressure reducing valves shall not exceed 40bar.

Minimum control pressure of technical Ordering code shall improve 1/0.66=1.515 after installing bottom plate pressure reducing valves.

Constant-ratio pressure reducing valves shall not be used when controlling internal oil drain and using back pressure valves(P0.45) with control pressure decreased to 3bar.

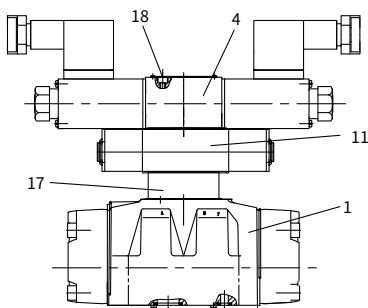


- 1- Main valve
- 4- Pilot valve
- 11- Switching time regulator
- 17- Pressure reducing valve
- 18- Bolt M5×105 GB/T70.1-10.9

Configuration of type GWEH.../6B2...S...D1 with proportional pressure reducing valve

Function and configuration


Back pressure valve:

Valves controlling oil inner supply with unloading passages, such as C, Z, G, H, P, S, T and V, In valves with zero pressure circulation and internal pilot oil supply, a back pressure valve (19) must be installed in the P-channel of the main valve to build up the minimum pilot pressure. The pressure differential of the back pressure valve must be added to the pressure differential of the main valve (see characteristic curves) in order to determine the actual value. The opening pressure of this valve is approx. 4.5 bar. NG10 valves do not have back pressure valves.




GWEH16.../.../6B2...PO.45 type
Structure chart of prepressing
valve of electro-hydraulic directional valve

- 19- Prepressing valve
- 20- Main valve
- 21- Control oil chamber(X)
- 22- Connecting plate



Pressure loss curve of **GWEH16.../6B2...** type electro-hydraulic directional valves passing through back pressure valves
(Test condition:use HLP46, $\theta_{oil}=40^{\circ}\text{C} \pm 5^{\circ}\text{C}$)

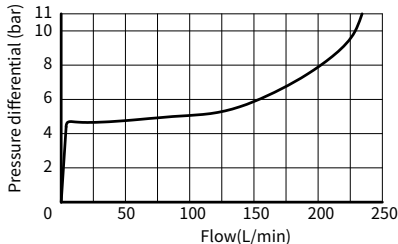

Pressure loss curve of **GWEH25.../6B2...** type electro-hydraulic directional valves passing through back pressure valves
(Test condition:use HLP46, $\theta_{oil}=40^{\circ}\text{C} \pm 5^{\circ}\text{C}$)

Ordering code

	WEH10	L4X	6B2						*
Explosion-resistant type I =G1 Explosion-resistant type II =G2									Further details in clear text
3 ways = 3 (For spool A and B) 4 ways = 4									No code=NBR seals V =FKM seals
Spool return By means of springs =No code Hydraulic return = H (only 2-position valve: spools C, D, K, Z, Y)									No code=without pressure reducing valves D1= with pressure reducing valves(pressure ratio 1:0.66) D3= with constant-value pressure reducing valves
See the function symbol of slide valve									No code=Without throttle insert B08= With throttle Φ0.8mm B10= With Throttle Φ1.0 mm B12= With Throttle Φ1.2 mm B15 = With Throttle Φ1.5 mm
Series L40 to L49 =L4X (L40 to L49: unchanged installation and connection dimensions)									No code = Without shifting time adjustment S = Switching time adjustment as meter-in control S2= Switching time adjustment as meter-out control
If pilot valve is 2 positions with 2 solenoid, main valve is 2 position with hydraulic return,'H' should be noted in front of spool. Without spring return = O Without spring return with detent = OF (not apply to B and Y for O and OF)									
Explosion protection solenoid in threaded connection=6B2									
DC 12V = G12 DC 24V = G24 DC 36V = G36 DC 110V = G110									
Pilot oil supply external, Pilot oil drain external = No code Pilot oil supply internal, Pilot oil drain external = E Pilot oil supply internal, Pilot oil drain internal = ET (exclusion: spool C, Z, F, G, H, P, T, V) Pilot oil supply external, Pilot oil drain internal = T									

Note:

- When the spools of type GWEH10../6B2.. is C, Z, F, G, H, P, T, V and so on, if the pilot oil is internal supply, the pilot oil should be external drain. And enough back pressure should be exerted on the return oil port T (must not be on the Port Y) so that the valve can change directions reliably.
- When the pilot pressure is higher than 250bar (It will be main pressure when the version is supply internal), the pressure reducing valve must be used.
- G1 Explosion protection grade EX d I Mb; G2 Explosion protection grade EX d II C T4 Gb

Ordering code

+ WEH		- L7X		6B2		/		/		*	
Explosion-resistant type I =G1										Further details in clear text	
Explosion-resistant type II =G2										No code=NBR seals V =FKM seals	
Working pressure 350 bar = No code										No code=without pressure reducing valves	
3 ways(For spool A and B) = 3										D1= with pressure reducing valves (pressure ratio 1:0.66)	
4 ways = 4										D3= with constant-value pressure reducing valves	
Nominal size 16 = 16										No code = Without back pressure valve	
25 = 25										P0.45= With back pressure valve, cracking pressure 4.5 bar	
Spool return										P0.70= With back pressure valve, cracking pressure 7 bar	
Spring return or centered = No code										No code= Without throttle insert	
Hydraulic return = H										B08= With throttle Ø0.8mm	
See the function symbol of slide valve										B10= Throttle Ø1.0 mm	
Series L70 to L79 = L7X										B12= Throttle Ø1.2 mm	
(L70 to L79:unchanged installation and connection dimensions)										B15= Throttle Ø1.5 mm	
If pilot valve is 2 positions with 2 solenoid, main valve is hydraulic return										No code = Without shifting time adjustment	
Without spring return = O										S = Switching time	
Without spring return with detent = OF										adjustment as meter-in control	
(H should be noted in front of spools. Not applied to spool Y for O and OF)										S2 = Switching time adjustment as meter-out control	
Explosion protection solenoid in threaded connection =6B2											
DC 12V = G12											
DC 24V = G24											
DC 36V = G36											
DC 110V = G110											
Pilot oil supply external,Pilot oil drain external = No code											
Pilot oil supply internal,Pilot oil drain internal = ET											
Pilot oil supply internal, Pilot oil drain external = E											
Pilot oil supply external, Pilot oil drain internal versions = T											


Note:

- For function of GWEH16-25 such as C, Z, F, G, H, P, T, V, etc, if applying control oil internal supp, please try to use external add enough back pressure on return port T(port Y shall not have back pressure) to ensure valves can reverse properly.
- Pressure reducing valves shall be applied when control pressure exceeds 250 bar.
- G1 Explosion protection grade EX d I Mb; G2 Explosion protection grade EX d II C T4 Gb

Symbols


Valves with spring centred

Detailed and simplified symbols for 3-position valves

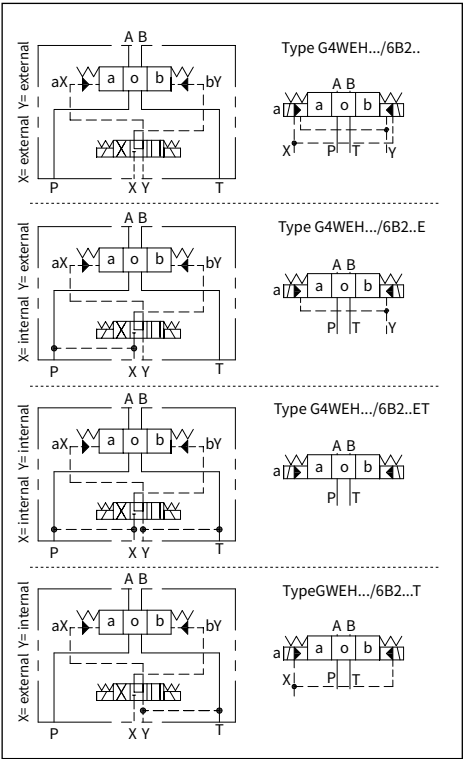

Valves with spring offset

(At position A or B of 2-position valve derived from 3-position)

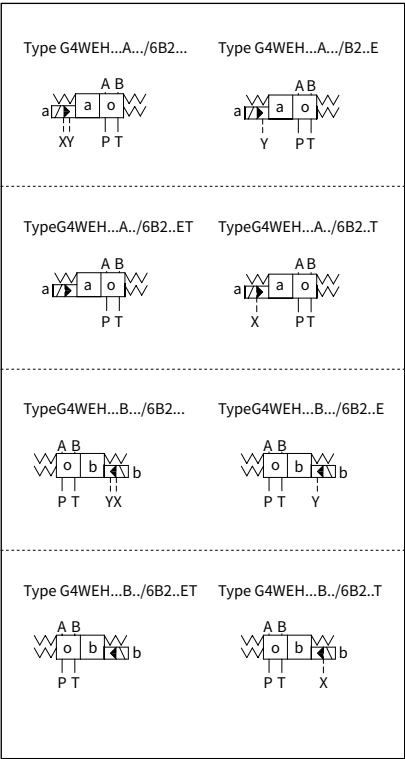

Symbols

Detailed and simplified symbols for 3-position valves

3-position valve


3-position valve type	Symbol	Crossover Symbol
G4WEH..E../6B2.. E		
G4WEH..F../6B2.. F		
G4WEH..G../6B2.. G		
G4WEH..H../6B2.. H		
G4WEH..J../6B2.. J		
G4WEH..L../6B2.. L		
G4WEH..M../6B2.. M		
G4WEH..P../6B2.. P		
G4WEH..Q../6B2.. Q		
G4WEH..R../6B2.. R		
G4WEH..S../6B2.. S		
G4WEH..T../6B2.. T		
G4WEH..U../6B2.. U		
G4WEH..V../6B2.. V		
G4WEH..W../6B2.. W		
G4WEH..M1../6B2.. M1		
G4WEH..M2../6B2.. M2		
G4WEH..J2../6B2.. J2		

2-position derivative from 3-position















2-position valve type	Symbol (solenoid at A end)	2-position valve type	Symbol (solenoid at B end)
G4WEH..EA../6B2..		G4WEH..EB../6B2..	
G4WEH..FA../6B2..		G4WEH..FB../6B2..	
G4WEH..GA../6B2..		G4WEH..GB../6B2..	
G4WEH..HA../6B2..		G4WEH..HB../6B2..	
G4WEH..JA../6B2..		G4WEH..JB../6B2..	
G4WEH..LA../6B2..		G4WEH..LB../6B2..	
G4WEH..MA../6B2..		G4WEH..MB../6B2..	
G4WEH..PA../6B2..		G4WEH..PB../6B2..	
G4WEH..QA../6B2..		G4WEH..QB../6B2..	
G4WEH..RA../6B2..		G4WEH..RB../6B2..	
G4WEH..SA../6B2..		G4WEH..SB../6B2..	
G4WEH..TA../6B2..		G4WEH..TB../6B2..	
G4WEH..UA../6B2..		G4WEH..UB../6B2..	
G4WEH..VA../6B2..		G4WEH..VB../6B2..	
G4WEH..WA../6B2..		G4WEH..WB../6B2..	
G4WEH..M1A../6B2..		G4WEH..M1B../6B2..	
G4WEH..M2A../6B2..		G4WEH..M2B../6B2..	
G4WEH..J2A../6B2..		G4WEH..J2B../6B2..	

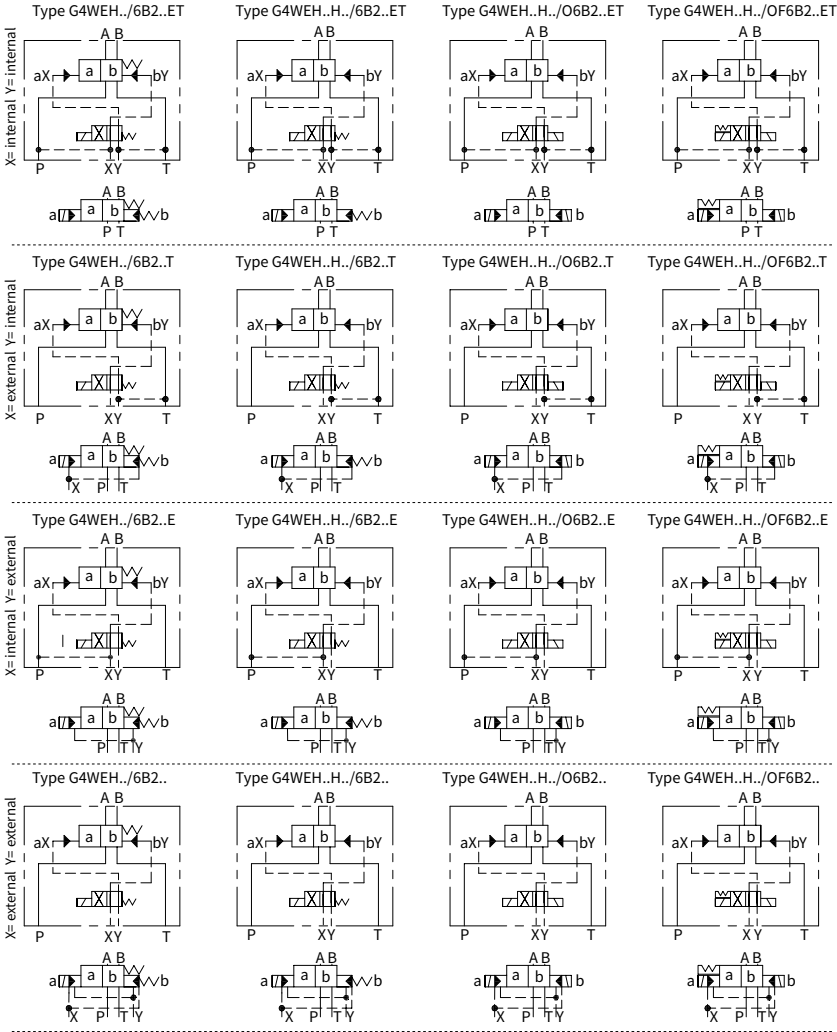Symbols

Detailed and simplified symbols for 2-position valves



Spools of 2-position valves

Spools:	A	C	D,DE	K	Z	B	Y,YE
Spool symbols:							
Transition symbols:							

Technical details

1. Hydraulic section

1). GWEH10.../6B2... Type explosion-proof electro-hydraulic directional valve

Maximum working pressure: P, A, B		bar	315							
Port T	With external pilot oil drain	bar	315							
	With internal pilot oil drain	bar	210							
Port Y	With external pilot oil drain	bar	210							
Min. control pressure	With external pilot oil supply	bar	3-position valve				10			
	With internal pilot oil supply (not apply to C, Z, F, G, H, P, T, V)	bar	Spring-return 2-position valve				10			
		bar	Hydraulic-return 2-position valve				7			
	Control oil internal supply (apply to C, Z, F, G, H, P, T, V)	bar	4.5							
Max. control pressure		bar	250							
Hydraulic fluid			Mineral oil, phosphate oil							
Temperature range of Hydraulic fluid		°C	-30 to+80 (NBR seals)							
			-20 to+80 (FKM seals)							
Viscosity range		mm ² /s	2.8 to 500							
Controlled quantity in commutating process		cm ³	3-position valve				2.04			
			2-position valve				4.08			
Total commutating time of valve from zero position to switching position (DC)										
Control pressur		bar	70	140	210	250				
-3-position valve		ms	65	60	55	50				
- 2-position valve		ms	80	75	70	65				
Total Switching time of valve from switching position to zero position										
-3-position valve		ms	30							
- 2-position valve		ms	35	40	30	35	25	30	20	25
Flow of shorter Switching time		L/min	About 35							
Installation position			HC, HD, HK, HZ and HY of hydraulic return shall be installed horizontally. The rest are arbitrary							
Weight		Single solenoid valve	kg	7.8						
	Double solenoid valve	kg	9.1							
	Switching time regulator	kg	1.0							
	Fixed ratio pressure reducing valve	kg	0.5							

Technical details

1. Hydraulic section

2). GWEH16.../6B2... Type explosion-proof electro-hydraulic directional valve

Maximum working pressure: P, A, B		bar	Type G-...WEH16../6B2... 350		
Port T	With external pilot oil drain	bar	250		
	With internal pilot oil drain	bar	210		
Port Y	With external pilot oil drain	bar	210		
Min. control pressure	With external pilot oil supply	bar	3-position valve		14
		bar	Spring-return 2-position valve		14
	With internal pilot oil supply	bar	Hydraulic-return 2-position valve		14
		bar	When applying back pressure valve or the flow is large, enginery of spool valve is 4.5 bar as C, Z, F, G, H, P, S, T and V		
Max. control pressure		bar	250		
Hydraulic fluid			Mineral oil, phosphate oil		
Temperature range of Hydraulic fluid		°C	-30 to + 80 (NBR seals)		
			-20 to + 80 (FKM seals)		
Viscosity range		mm²/s	2.8 to 500		
Switching pilot oil volume		cm³	Spring-centering 3-position valve		5.72
		cm³	2-position valve		11.45
*Switching time from '0' position to working position (DC solenoid)					
Control pressur	bar	50	150	250	
- Spring-centering 3-position valve	ms	65	60	58	
-2-position valve	ms	65	55	50	
*Switching time from working position to "0" position					
- Spring-centering 3-position valve	ms	30			
- 2-position valve	ms	45	35	30	
Installation position			C,D,K,Z,Y Type hydraulic-return valves are installed horizontally, the rest can be installed arbitrarily		
Flow of shorter switching time		L/min	About 35		
Weight of the valve		kg	About 10.6		

*Switching time refers to time from drawing of solenoid of pilot valve to full opening of main valve.

Technical details

1. Hydraulic section

3). GWEH25.../6B2... Type explosion-proof electro-hydraulic directional valve

Maximum working pressure:		bar	Type G-H-...WEH25../6B2...			
P, A, B			350			
Port T	With external pilot oil drain	bar	250			
	With internal pilot oil drain	bar	210			
Port Y	With external pilot oil drain	bar	210			
Min. control pressure	With external pilot oil supply	bar	Spring-centering 3-position valve		13	
			Spring-return 2-position valve		13	
	With internal pilot oil supply	bar	Hydraulic-return 2-position valve		8	
			When applying prepressing or the flow is large correspondingly ,enginery of spool valve is 4.5 bar as C, Z, F, G, H, P, S, T and V			
Max. control pressure		bar	250			
Hydraulic fluid			Mineral oil, phosphate oil			
Temperature range of Hydraulic fluid		°C	-30 to + 80 (NBR seals)			
			-20 to + 80 (FKM seals)			
Switching pilot oil volume		cm ³	Spring-centering 3-position valve		14.2	
		cm ³	2-position valve		28.4	
*Switching time from '0' position to working position (DC solenoid)						
Pilot control pressure		bar	50	140	210	250
- Spring-centering 3-position valve		ms	85	75	70	65
- 2-position valve		ms	160	130	120	105
*Switching time from working position to "0" position						
-Spring-centering 3-position valve		ms	40			
- 2-position valve		ms	125	100	90	80
Installation position			C, D, K, Z, Y Type hydraulic-return valves are installed horizontally, the rest can be installed arbitrarily			
Flow of shorter switching time		L/min	About 35			
Weight of the valve		kg	About 19			

*Switching time refers to time from drawing of solenoid of pilot valve to full opening of main valve.


Technical details

2. Electrical data

Type of voltage		DC
Voltage (allowable fluctuation of $\pm 10\%$)		12、24V、36V、110V
Power	W	30
Duty cycle		Continuous
Temperature range of environment	°C	~ +50
Temperature range of coil	°C	~ +150
Protection class to DIN40050		IP65

Characteristic curves (Measured at $\vartheta_{oil}=40^{\circ}\text{C} \pm 5^{\circ}\text{C}$, using HLP46)


Type GWEH 10../6B2..

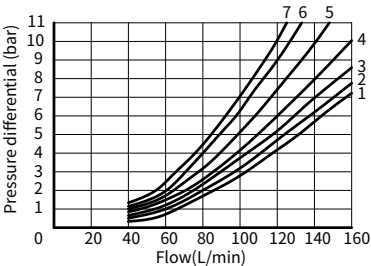

Pressure loss curve graph of GWEH 16../6B2..Type electro-hydraulic directional control valve

Enginery symbol	Switching position				Enginery symbol	Neutral position		
	P → A	P → B	A → T	B → T		A → T	B → T	P → T
E, Y, D	2	2	4	5				
F	1	4	1	4	F	3	-	6
G, T	4	2	2	6	G, T	-	-	7
H, C	4	4	1	4	H	1	3	5
J, K	1	2	1	3				
L	2	3	1	4	L	3	-	-
M	4	4	3	4				
P	4	1	3	4	P	-	7	5
Q, V, W, Z	2	2	3	5				
R	2	2	3	-				
U	3	3	3	4	U	-	4	-


Type GWEH 16../6B2..

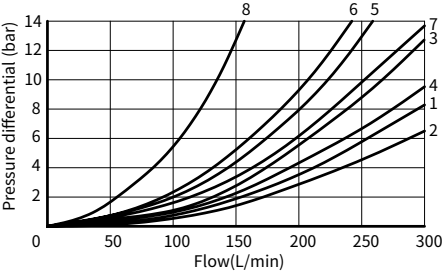

Pressure loss curve graph of GWEH 16../6B2.. Type electro-hydraulic directional control valve

Symbol	Switching position				
	P → A	P → B	A → T	B → T	P → T
E, Y, D	1	1	1	3	-
F	2	2	3	3	-
G, T	5	1	3	7	6
H, C, Q, V, Z	2	2	3	3	-
J, K, L	1	1	3	3	-
M, W	2	2	4	3	-
R	2	2	4	-	-
U	1	1	4	7	-
S	4	4	4	-	8

Type GWEH 25../6B2..

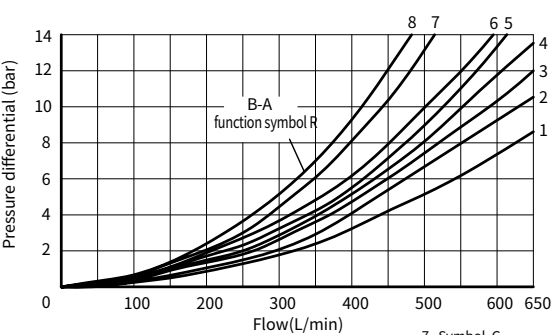

Pressure loss curve graph of GWEH 25../6B2.. Type electro-hydraulic directional control valve

7 Symbol G
Neutral position P-T
8 Symbol T
Neutral position P-T

Symbol	Switching position			
	P → A	P → B	A → T	B → T
E	1	1	1	3
F	1	4	3	3
G	3	1	2	4
H	4	4	3	4
J, Q	2	2	3	5
L	2	2	3	3
M	4	4	1	4
P	4	1	1	5
R	2	1	1	-
U	4	1	1	6
V	2	4	3	6
W	1	1	1	3
T	3	1	2	4

Characteristic curves

(Measured at $\vartheta_{oil}=40^{\circ}\text{C} \pm 5^{\circ}\text{C}$, using HLP46)

When valve is at the middle position, open area of all flow directions.

Size	Enginery	Open area (mm ²)			
		P → A	P → B	A → T	B → T
GWEH 10../6B2..	Q	-	-	13	13
	V	13	13	13	13
	W	-	-	2.4	2.4
GWEH 16../6B2..	Q	-	-	32	32
	V	32	32	32	32
	W	-	-	6	6
GWEH 25../6B2..	Q	-	-	83	83
	V	83	83	83	83
	W	-	-	14	14

Performance limit

The switching function of valves depends on filtration due to adhesive effects. To achieve the specified permissible flow values, we recommend full-flow filtration with 25 µm. The flow forces acting within the valves also have an influence on the flow performance. With 4-way directional valves, the specified flow data are therefore valid for normal applications with 2 directions of flow (e.g. from P to A and simultaneous return flow from B to T) (see table).

If the fluid flows in only one direction, the permissible flow may be significantly lower in critical cases (e.g. use of a 4-way directional as 3-way directional valve with port A or B blocked).

Enginery limit table of GWEH 10../6B2.. Type electro-hydraulic directional control valve

3-position valve, spring centering			
Flow(L/min)	Pressure stage(bar)		
Symbol	200	250	315
E, J, L, M, Q, U, W, R, V	160		
H	160	150	120
G, T	160		140
F, P	160	140	120
2-position valve whose main valve has a returning spring			
C, D, K, Z, Y	160		

2-position valve, main valve without spring			
Flow(L/min)	Pressure stage(bar)		
Symbol	200	250	315
HC HD HK HZ HY	160		
HC.../O HD.../O	160		
HK.../O HZ.../O			
HC.../OF... HD.../OF... HK.../OF... HZ.../OF...	160		

Enginery limit table of GWEH 16../6B2.. Type electro-hydraulic directional control valve

Spring-centering 3-position valve						2-position valve					
Flow(L/min)	Pressure stage(bar)					Flow(L/min)	Pressure stage(bar)				
Symbol	70	140	210	280	350	Symbol	70	140	210	280	350
E, H, J, L, M, Q, U, W, R	300	300	300	300	300	C	300	300	300	300	300
F, P	300	250	180	170	150	D, Y	300	270	260	250	230
G, T	300	300	240	210	190	K	300	250	240	230	210
S	300	300	300	250	220	Z	300	260	190	180	160
V	300	250	210	200	180	Hydraulic-return 2-position valve					
						HC, HD, HK, HZ, HY	300	300	300	300	300
						When control oil is supplied internally and pressure valve is equipped, the flow of spool valve's enginery of H, F, P, G, T, S, V, C and Z Types reaches 160L/min.					

Performance limits

Enginery limit table of GWEH 25../6B2.. Type electro-hydraulic directional control valve

3-position valve of spring centering						2-position valve					
Flow(L/min)	Pressure stage(bar)					Flow(L/min)	Pressure stage(bar)				
Symbol	70	140	210	280	350	Symbol	70	140	210	280	350
E, L, M	650	650	650	650	650	G, D, K, Z, Y	650	650	650	650	650
U, W, Q						Hydraulic-return 2-position valve (main valve without spring)					
G, T	400	400	400	400	400	HC HD HK	650	650	650	650	650
F	650	550	430	330	300	HZ HY					
H	650	650	550	400	360	HC.../O					
J	650	650	650	600	520	HD.../O					
P	650	550	430	330	300	HK.../O	650	650	650	650	650
V	650	550	400	350	310	HZ.../O					
R	650	650	650	650	580	HC.../OF...					
						HD.../OF...					
						HK.../OF...	650	650	650	650	650
						HZ.../OF...					
						When control oil is supplied internally and pressure valve is equipped, the flow of spool valve's enginery of G, Z, V, F, H, P, T Types reaches 180L/min.					

02


Pilot-operated solenoid valve

A four-way Explosion protection directional valve with NG 6 (G4WE6.../B2...) is used as the pilot valve. The slide valve is kept in the middle or the initial position by the spring, and kept on the working position through the solenoid or the locator.

The valve applies the DC solenoid, and the function of the pilot solenoid valve applied to the main valve with various functions is shown as the table below:

Main valve	Pilot-operated solenoid valve
Spring-centering 3-position valve/ transformed 2-position valve	Use G4WE6J-6X/B2...3-position valve/
Structure of 2-position main valve: Y.../...and HY.../... B.../...and HB.../...	Use G4WE6J-6X/B2...2-position valve
2-position valve : A, C, D, K and Z Type functions HA, HC, HD, HK, HZ Type valves	Use 2-position valve with D Type enginery Types of main valve's structure: Spring return G4WE6D-6X/B2... No returning spring G4WE6D-6X/OB2... No returning spring, with a positioner G4WE6D-6X/OFB2...

Unit dimension of valve type GWEH16../6B2..

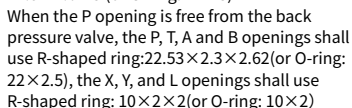

- 0226

