



2.21

2/2, 3/2 and 4/2 directional poppet valve with solenoid actuation

Type M-.SEW6...L3X

Size 6
Up to 420 bar
Up to 25 L/min



Contents

Function and configuration	02
Symbols	03
Ordering code	03
Technical data	04
Electrical data	04
Characteristic curves	05
Unit dimensions	06-07

Features

- Direct-acting solenoid direction shut-off valve
- Mounting face as per DIN24 340 A
- ISO 4401 and CETOP-RP 121H
- Free of leakage
- Switching flexibility in high-pressure state
- Replace the coil, can take pressure operation
- Solenoid coil can rotate for 90 degrees
- Manual emergency operation available

Function and configuration

M-SEW6 direction valve is a solenoid shut-off directional poppet valve for control oil opening, stop and flow direction.

Two-position TEE solenoid directional poppet valve consists of valve body (1), Solenoid (2), and valve element (3). Connect a superposition plate below the two-position TEE solenoid directional poppet valve to connect valve body (4), it becomes into two-position four-way direction poppet valve. The manual emergency button (5) can be used to operate the valve when the Solenoid is not powered on.


• M-3SEW6 two-position TEE solenoid directional poppet valve

1). Initial position:


when the Solenoid is not energized, pretention of spring (6) keeps valve element (3) on valve seat (7) on the left, so that oil port P is connected to A and oil port T is closed.

2). Switching position:

after the Solenoid is energized, through angular lever (9) and ball (10), the force of Solenoid (2) acts on push rod (11) of the two-side seal, thus to push valve element (3) and maintain it on right valve seat (8), causing oil port P closed and oil port A connected to port T. Since push rod (11) and valve element (3), acted by the inlet pressure, is in a balance state of axial hydraulic pressure, the valve can be used when pressure is up to 420bar.

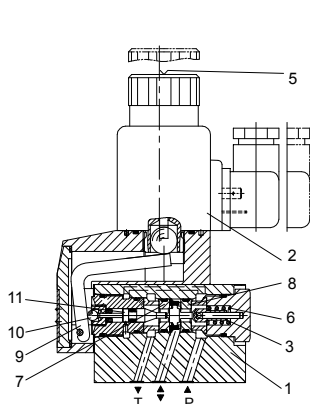

M-3SEW6 two-position TEE solenoid directional poppet valve

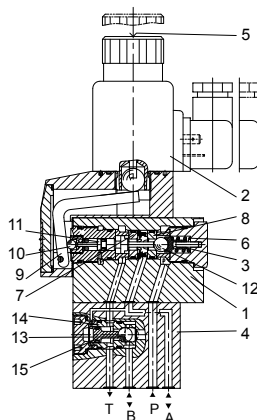

M-4SEW6 2-position 4-way solenoid directional poppet valve

• M-4SEW6 2-position 4-way solenoid directional poppet valve

1). Initial position:

when the Solenoid is not energized, pretention of spring (6) keeps valve element (12) on valve seat (8) on the right, oil port P is closed and port A connected to T; pressure oil supplied from oil port P push steel ball (13) to valve seat (14), upon which oil port P is connected to B and A connected to T; besides, a control oil line is connected from oil port A acts on the big area of control piston (15), which can be used for unloading to oil tank.

2). Switching position:

after the Solenoid is energized, oil port P is connected to A; pressure oil from the pump goes through the control oil line connected from port A and acts on the big area of control piston (15); steel ball (13) is pushed to the other side of valve seat (14), thus oil port P is connected to A and B connected to T.

• Cartridge restriction choke (model M-.SEW6.L3X/.../B...)


To restrict flow through the valve, a restriction choke can be installed. Restriction choke is installed on port P.



• Cartridge type one-way valve (model M-.SEW6.L3X/.../P)


Cartridge type one-way valve allows oil flow in from port P and it is closed for reverse flowing.

One-way valve installed on port P.




Spool symbols


Type M-3SEW6U-L3X/..




Type M-4SEW6D-L3X/..




Type M-2SEW6P-L3X/..




Type M-3SEW6C-L3X/..



Type M-4SEW6Y-L3X/..



Type M-2SEW6N-L3X/..



02

Ordering code

M	—	SEW	6	—	L3X / 42	M		N	/			
2 work ports = 2 3 work ports = 3 4 work ports = 4											Further details in clear text	
Solenoid directional poppet valve											No code =	NBR seals
Diameter 6 = 6											V =	FKM seals
Spool symbols												
L30 ~ L39series = L3X												
Work pressure to 420bar = 42												
Coil replaceable (air gap type) Solenoid = M												
12VDC = G12												
24VDC = G24												
110VDC = G110												
205VDC = G205												
220VDC = G220												
110VAC (Need to take rectifying plug Z5) = W110R												
220VAC (Need to take rectifying plug Z5) = W220R												
With manual emergency button = N											No code = Without cartridge one-way valve, without cartridge restriction choke P= Without Cartridge check valve B12 = Orifice Φ1.2 mm B15 = Orifice Φ1.5 mm B18 = Orifice Φ1.8 mm B20 = Orifice Φ2.0 mm B22 = Orifice Φ2.2 mm K4 = Without plug Z4 = With square plug Z5L= Square plug with light Z5 = With rectifier plug (just for W110R and W220R) Note: K4, Z4, Z5L is not suitable for W110R and W220R	

Technical data

Installation position			Optional
Environment temperature °C			-30 to +50 (NBR seal)
			-20 to +50 (FKM seal)
Weight	Two two-way Solenoidic directional valve	Kg	1.5
	Two three-way Solenoidic directional valve	Kg	1.5
	Two four-way Solenoidic directional valve	Kg	2.3
Max operation pressure	Port P, A, B	bar	420
	Port T		100
Max flow L/min			25
Fluid			Mineral oil suitable for NBR and FKM seal
			Phosphate ester for FKM seal
Fluid temperature range °C			-30 to +50 (NBR seal)
			-20 to +50 (FKM seal)
Viscosity range mm ² /s			2.8 to 500
Degree of contamination			Maximum permissible degree of fluid contamination: Class 9. NAS 1638 or 20/18/15, ISO4406

Electrical data


Voltage type								DC				AC							
Available voltage								V				12, 24, 110, 205, 220				110, 220 (Only by Z5 rectifier plug)			
Allowed voltage (deviation)								%				+10 ~ -15							
Required power								W				30							
Continuous power-on time								%				100							
Switching time in compliance with ISO 6403																			
Pressure bar	Flow L/min	DC								AC50HZ									
		on/ms (without oil tank pressure)				off/ms				on/ms (without oil tank pressure)				off/ms					
		U	C	D	Y	U, C	D, Y	U	C	D	Y	U, C	D, Y						
140	25	25	30	25	30	10	10	30	40	30	40	35	35						
280	25	25	30	25	30	10	10	35	45	35	45	40	40						
320	25	25	35	25	35	10	10	35	50	35	50	40	40						
420	25	25	35	25	35	10	10	40	50	40	50	50	50						
Switching frequency								Time/h				Up to 15000							
IP rating as per DIN 40050												IP65							
Max coil temperature								°C				+150							

Note: for electrical connection, protective wire (PE \perp) shall be earthed as required.

Characteristic curves (Measured at $\vartheta_{oil}=40^{\circ}\text{C} \pm 5^{\circ}\text{C}$, using HLP46)

Δp - q_v characteristic curves

2-position 2-way solenoid directional poppet valve

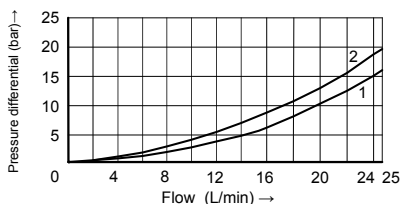


1 M-2SEW6N ..., P to T

2 M-2SEW6P ..., P to T

Δp - q_v characteristic curves

2-position 3-way solenoid directional poppet valve

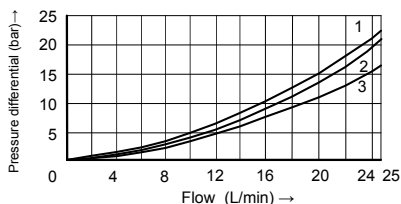


1 M-3SEW6^U_C ..., A to T

2 M-3SED6U ..., P to A

3 M-3SED6C ..., P to A

Δp - q_v characteristic curves

2-position 4-way solenoid directional poppet valve

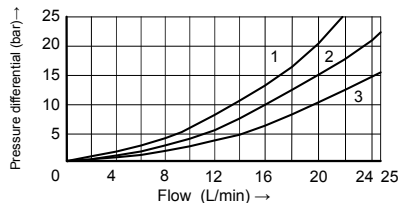


1 M-4SEW6^D_Y ..., A to T

2 M-4SEW6^D_Y ..., P to A

3 M-4SEW6^D_Y ..., P to B, B to T


Δp - q_v characteristic curves

Cartridge check valve

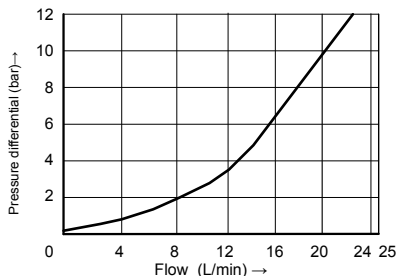

Δp - q_v characteristic curves

Cartridge type restriction choke

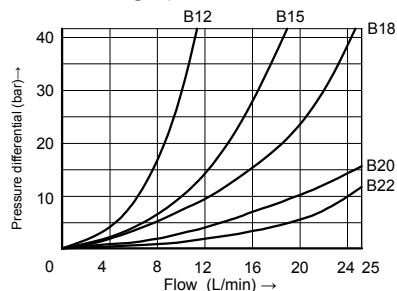

Unit dimensions

· 2-position 2-way, 2-position 3-way solenoid directional poppet valve

